

pliant
OFFSHORE

DAMS

DEPARTURE ANGLE MEASUREMENT SYSTEM

Designed for cable laying vessels, it allows accurate, reliable and responsive measurement of the departure angle of cables.





01 INTRODUCING DAMS

Pliant Offshore developed the DAMS (Departure Angle Measurement System). Designed for cable laying vessels, it allows accurate, reliable and responsive measurement of the departure angle of cables.

It has successfully proven its value during automated cable laying processes and cable loading. We integrated an advanced 3D engine with optimal tracking and optimized filtering algorithms, exceeding all available existing systems on the market.

OUR ADDRESS

Heusing 11
4817 ZB Breda
The Netherlands

CONTACT US

T +31 (0) 76 581 6588
E info@pliant-offshore.com
W pliant-offshore.com

02 FEATURES

DAMS

The system has proven to be extremely reliable, both in simulated stress-tests as well in actual fully automated cable laying for hundreds of kilometers in all kinds of weather conditions. The system allows full automation of the cable laying and thereby improves the speed and reduces down-time. It provides valuable logging information for events and incidents, making it indispensable for survey and reporting. It adds instant value for process automation or survey applications.

01

Reliable in all weather conditions

02

Supports multiple vessel configurations

03

Extremely accurate, exceeding conventional laser measurements

04

Fully configurable for various conditions, redundancy or extreme performance

05


Proven in automated cable laying

06

Plug-and-play commissioning

07

DAMS service software, for on-site service and remote support

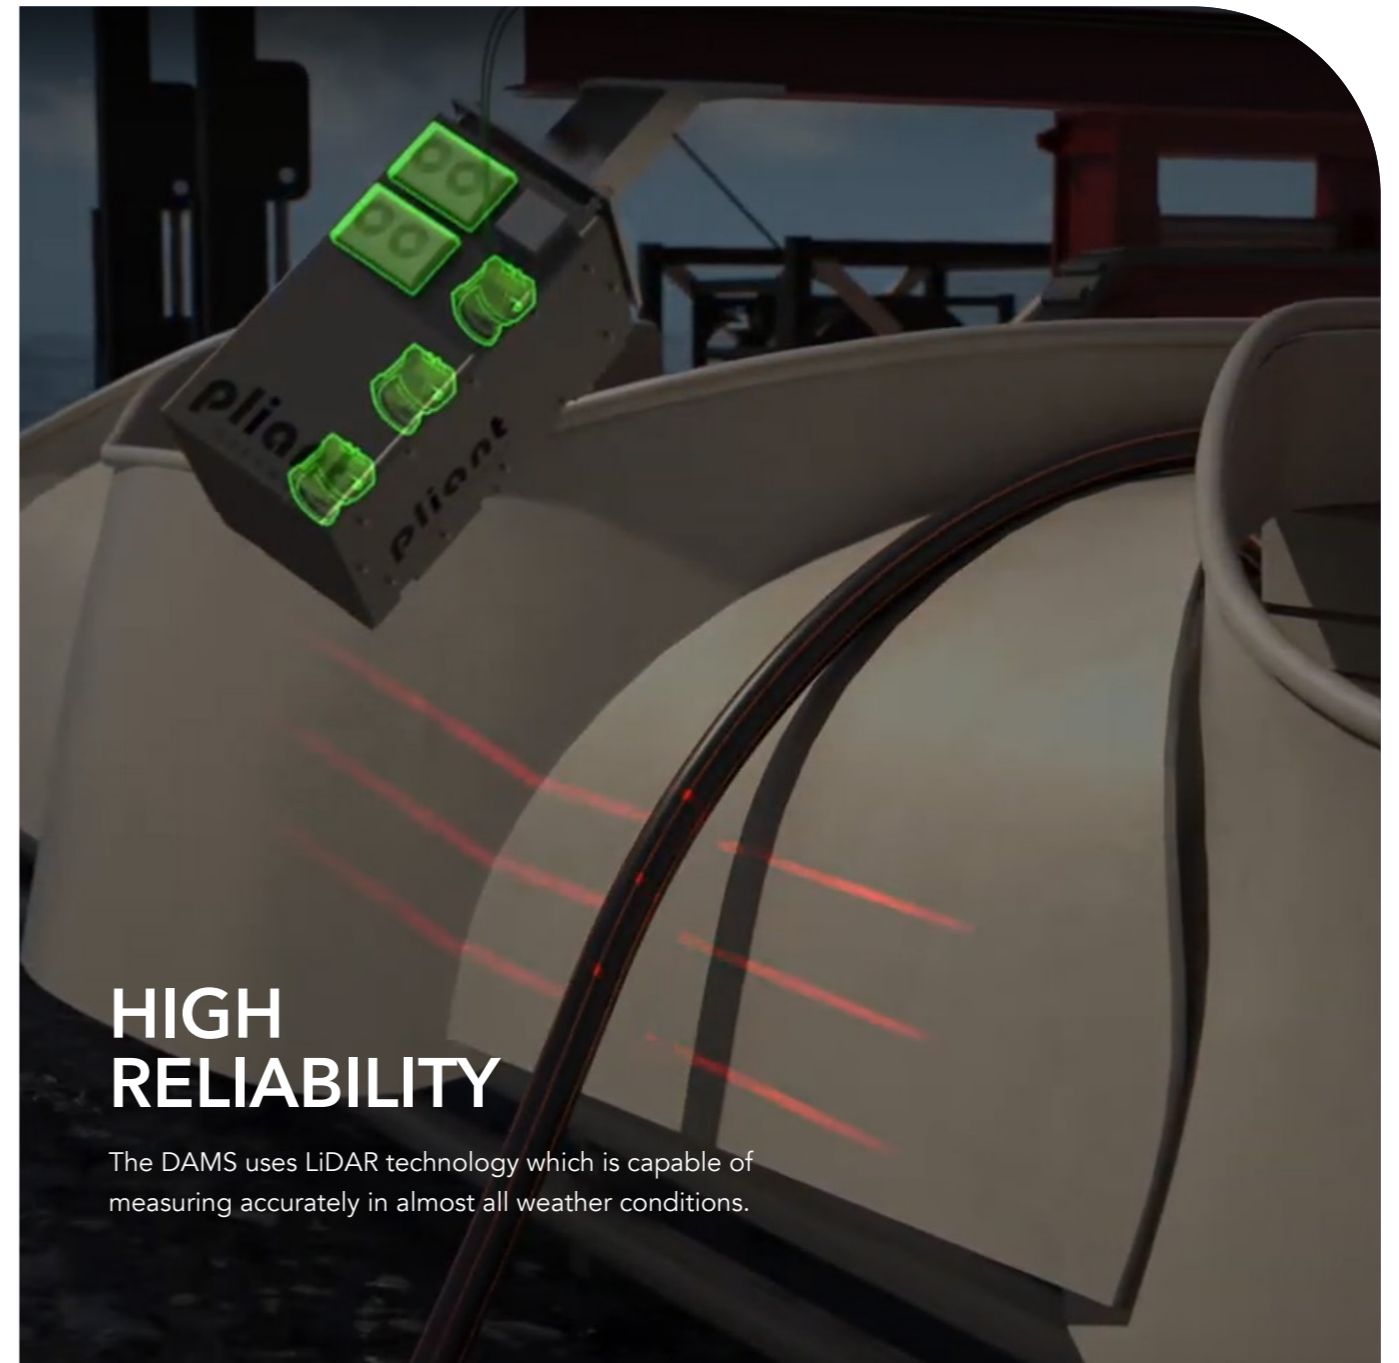

HIGH RELIABILITY

The DAMS uses LiDAR technology which is capable of measuring accurately in almost all weather conditions.

03 CONFIGURATION

STANDARD

The standard edition is an accurate and responsive solution for angle measurements. It can be used for the automated cable laying process. The standard edition is upgradable to the premium edition.

- 10 Hz
- $\pm 0.4^\circ$ vertical angle
- $\pm 1.0^\circ$ horizontal angle
- 2x SICK Lidar Sensors
- Single cooling / heating unit

PREMIUM

The premium edition features the most accurate measurements with the lowest latency. Laser measurements, power supplies and climate control are all redundant to ensure the system can be used at any time for fully automated cable laying control.

- 25 Hz
- $\pm 0.2^\circ$ vertical angle
- $\pm 0.5^\circ$ horizontal angle
- 3x SICK Lidar Sensors
- Dual cooling / heating unit
- Redundant power supply

04 DETAILS



Robust

The Pliant DAMS is built using only high-grade offshore-proof materials to ensure durability. The device has an internal climate controlled environment, sealed in an airtight stainless steel box for maximum robustness in demanding offshore conditions.

Plug & Play

The Pliant DAMS is a Plug-and-Play device. The advanced calibration functionality allows easy configuration with a single mouse click in the DAMS service software. Multiple vessel configurations can be stored parallel and easily switched if the DAMS is mounted on another vessel.

Non-Destructive Measurements

The infrared laser technology ensures that no physical contact with the cable is required. Compared to mechanical measurement systems, there is no risk of physical damage to the cable.

Accurate

The DAMS is accurate up to 0.2° over the entire field of view for vertical angles, horizontal up to 0.5° . The DAMS accuracy outperforms other available system due to its advanced 3D engine. Depending on the placement of the DAMS the accuracy can vary and increased even further.

Fast

The Pliant DAMS is very suitable for cable laying automation, by direct control of cable tensioners. The optimized low-latency filters produce a reliable and stable signal up to 25Hz.

DAMS



Heusing 11 | 4817 ZB Breda | The Netherlands
T: +31 (0) 76 581 6588 | M: info@pliant-offshore.com

pliant-offshore.com